

2000h at 85°C


■ Features

● 600V to 630V Standard at 85°C

● RoHS Compliant

■ Applications

● High Professional Inverters and Power Supplies




Items	Characteristics		
Operating Temperature Range(°C)	-25~+85		
Voltage Range (V)	600,630		
Capacitance Range(μF)	1000~5600		
Capacitance Tolerance (20°C,120Hz)	±20%		
Leakage Current (μA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0.01CV or 5mA, whichever is smaller . C: Nominal Capacitance(μF) V: Rated Voltage(V)		
Dissipation Factor (20°C, 120Hz)	U _R (V)	600	630
	Tan δ .max	0.25	0.30

Life Time	Useful Life		Load Life	Endurance Test	Shelf Life
	>4000h	>65000h	2000h	2000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ±30% of initial value		Within ±20% of initial value	Within ±10% of initial value	Within ±20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U _R I _R 85°C	U _R 1.2×I _R 40°C	U _R I _R 85°C	U _R I _R = 0 85°C	<div style="border: 1px solid black; padding: 5px;"> After test: U_R to be applied for 60min>24h before measurement </div>

CD 13H BH SERIES




Part Number System (Ex:630v2200 μ F)

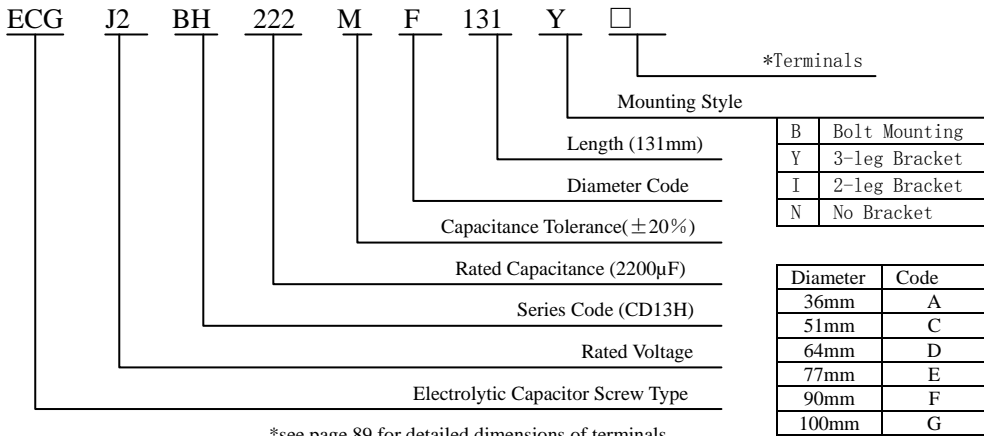

*see page 89 for detailed dimensions of terminals.

Dimensions

mm

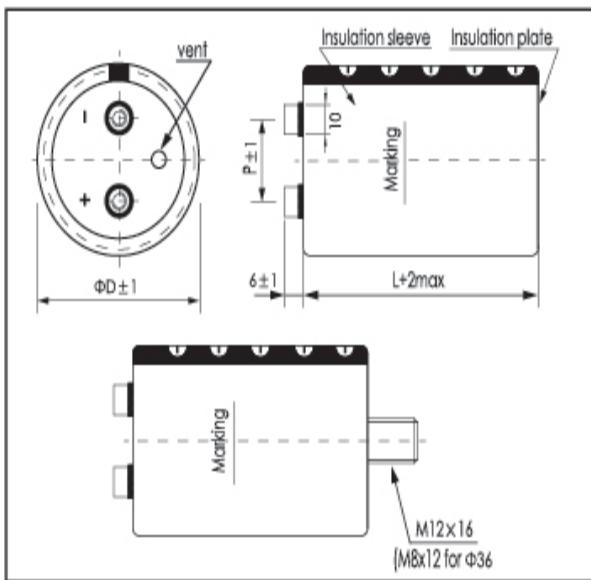

ϕ D/mm	51	64	77	90	101
P/mm	22.0	28.2	31.4	31.4	41.5

*Hex head screw M5 \times 10 and M6 \times 12 are standard screws.

Longer screws are available on request.

*Max tightening torque for screw terminal M5:3Nm, M6:6Nm.

Max torque for bolt mounting M12:12.5Nm.

*Screws, Bracket and cap nut will be delivered separately.

See "Accessories"(page 88.89)for shape and dimensions.

Ripple Current Coefficient


Frequency(Hz)	50/60	120	300	1k	>10k
Coefficient	0.80	1.00	1.10	1.30	1.40

Ambient Temp (°C)	40	60	85
Coefficient	1.89	1.67	1.00

The useful life can be prolonged by operating capacitor at loads below the rated values (e.g.lower operating voltage, Rms ripple current or ambient temperature) and by appropriate cooling measures.

It is advisable not to apply a ripple current exceeding the rated ripple current without any cooling measures as this will shorten capacitor's life.

Lifetime Diagram

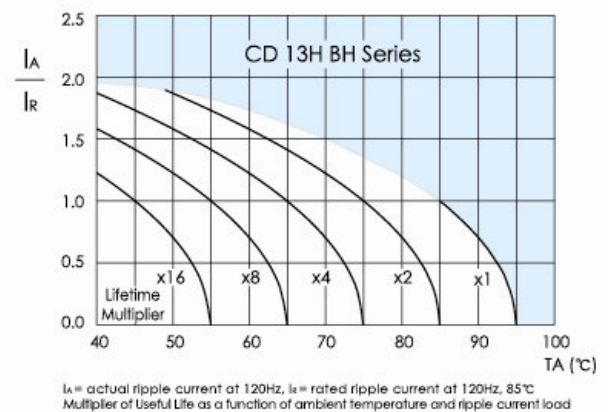

CD 13H BH SERIES



Ratings for CD 13H BH Series

U _R (Surge Voltage) Code	Rated Capacitance	Max. ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 105°C, 120kHz	Size Φ D×L	P/N
(V)	(μF)	(mΩ)	(mΩ)	(Arms)	(mm)	-
600 (650) 2S	1200	242	121	7.7	64X96	ECG2SBH122MD096 <input type="checkbox"/> <input type="checkbox"/>
	1500	224	112	9.3	64X115	ECG2SBH152MD115 <input type="checkbox"/> <input type="checkbox"/>
	1800	194	97	10.1	77X96	ECG2SBH182ME096 <input type="checkbox"/> <input type="checkbox"/>
	2200	162	81	12.0	77X115	ECG2SBH222ME115 <input type="checkbox"/> <input type="checkbox"/>
	2700	132	66	14.0	77X130	ECG2SBH272ME130 <input type="checkbox"/> <input type="checkbox"/>
	3300	88	44	16.4	77X155	ECG2SBH332ME155 <input type="checkbox"/> <input type="checkbox"/>
	3300	88	44	16.4	90X131	ECG2SBH332MF131 <input type="checkbox"/> <input type="checkbox"/>
	3900	74	37	17.8	90X131	ECG2SBH392MF131 <input type="checkbox"/> <input type="checkbox"/>
	4700	62	31	21.0	90X157	ECG2SBH472MF157 <input type="checkbox"/> <input type="checkbox"/>
	5600	56	28	24.5	90X196	ECG2SBH562MF196 <input type="checkbox"/> <input type="checkbox"/>
630 (680) J2	1000	300	150	6.0	64X130	ECGJ2BH102MD130 <input type="checkbox"/> <input type="checkbox"/>
	1200	266	133	6.7	77X115	ECGJ2BH122ME115 <input type="checkbox"/> <input type="checkbox"/>
	1500	212	106	8.1	77X130	ECGJ2BH152ME130 <input type="checkbox"/> <input type="checkbox"/>
	1800	176	88	9.8	77X155	ECGJ2BH182ME155 <input type="checkbox"/> <input type="checkbox"/>
	2200	144	72	10.7	90X131	ECGJ2BH222MF131 <input type="checkbox"/> <input type="checkbox"/>
	2700	128	64	12.8	90X157	ECGJ2BH272MF157 <input type="checkbox"/> <input type="checkbox"/>
	3300	106	53	14.7	90X171	ECGJ2BH332MF171 <input type="checkbox"/> <input type="checkbox"/>
	3900	94	47	17.9	90X196	ECGJ2BH392MF196 <input type="checkbox"/> <input type="checkbox"/>
	4700	78	39	21.6	90X196	ECGJ2BH472MF196 <input type="checkbox"/> <input type="checkbox"/>
	5600	70	35	24.9	101X220	ECGJ2BH562MG220 <input type="checkbox"/> <input type="checkbox"/>

Mounting code(" B" for bolt mounting, "Y/I/N" for bracket mounting)

Terminal options(A,B,C see "Dimensions" for details.)

Customer products are available on request.