


5000h at 85°C

Features

- Long Life
- High Reliability
- RoHS Compliant

Applications

- High Currents for High Professional
- Power Application and Inverters

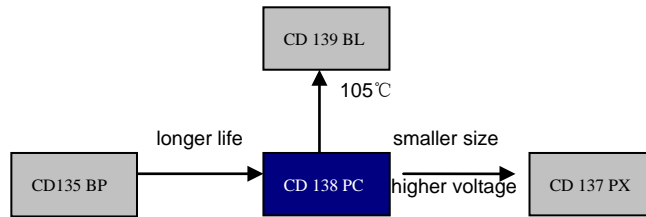


Items	Characteristics
Operating Temperature Range(°C)	-40 ~ +85
Voltage Range (V)	350~450
Capacitance Range(μF)	1000~18000
Capacitance Tolerance (20°C,120Hz)	±20%
Leakage Current (μA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0.01CV or 5mA, whichever is smaller . C: Nominal Capacitance(μF) V: Rated Voltage(V)
Dissipation Factor (20°C, 120Hz)	Less than 0.15
Stability at Low Temperature(120Hz)	$C(-25^{\circ}\text{C})/C(+20^{\circ}\text{C}) \geq 0.7$

Life Time	Useful Life		Load Life	Endurance Test	Shelf Life
	>10000h	>100000h	5000h	5000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ±30% of initial value		Within ±20% of initial value	Within ±10% of initial value	Within ±20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U_R I_R 85°C	U_R $1.2 \times I_R$ 40°C	U_R I_R 85°C	U_R $I_R = 0$ 85°C	<div style="border: 1px solid black; padding: 5px;"> After test: U_R to be applied for 60min>24h before measurement </div>

CD 138 PC SERIES




Part Number System (Ex:400v6800μF)

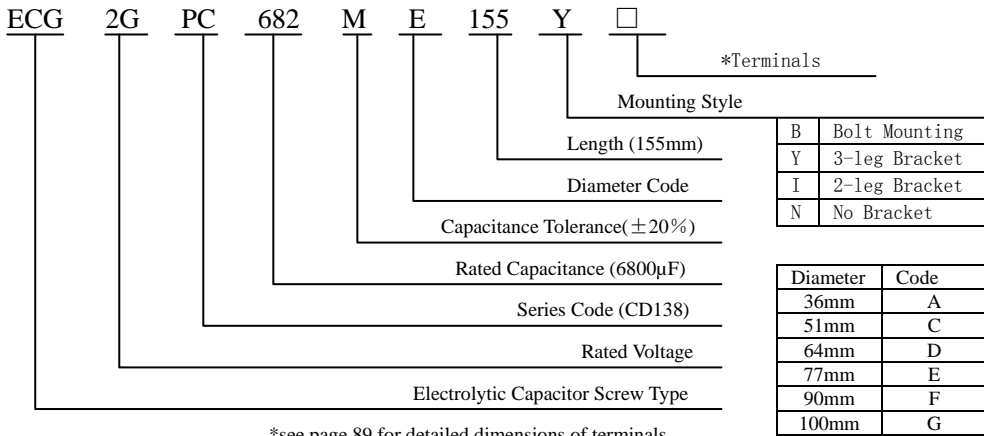

*see page 89 for detailed dimensions of terminals.

Dimensions mm

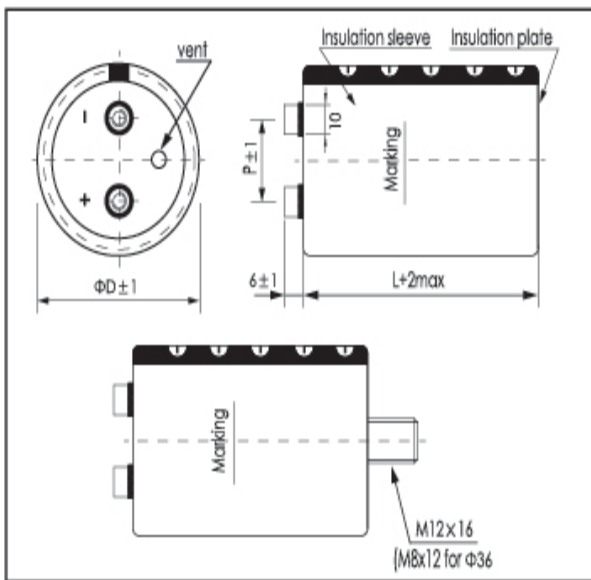

Φ D/mm	51	64	77	90	101
P/mm	22.0	28.2	31.4	31.4	41.5

*Hex head screw M5×10 and M6×12 are standard screws.

Longer screws are available on request.


*Max tightening torque for screw terminal M5:3Nm, M6:6Nm.

Max torque for bolt mounting M12:12.5Nm.

*Screws, Bracket and cap nut will be delivered separately.

See "Accessories"(page 88.89) for shape and dimensions.

Lifetime Diagram

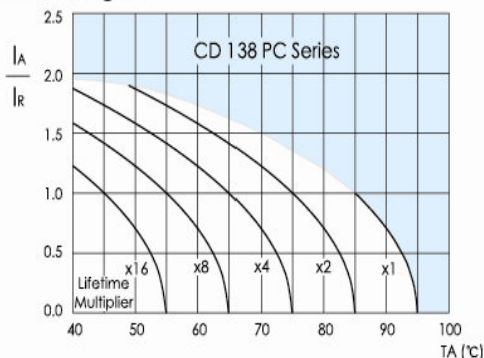

I_A = actual ripple current at 120Hz, I_R = rated ripple current at 120Hz, 85°C
Multiplier of Useful Life as a function of ambient temperature and ripple current load

Ripple Current Coefficient

Frequency(Hz)	50/60	120	300	1k	>10k
Coefficient	0.80	1.00	1.10	1.30	1.40


Ambient Temp (°C)	40	60	85
Coefficient	1.89	1.67	1.00

The useful life can be prolonged by operating capacitor at loads below the rated values (e.g.lower operating voltage, Rms ripple current or ambient temperature) and by appropriate cooling measures.


It is advisable not to apply a ripple current exceeding the rated ripple current without any cooling measures as this will shorten capacitor's life.

Typical Curves

ESR ~ Frequency f at 20°C

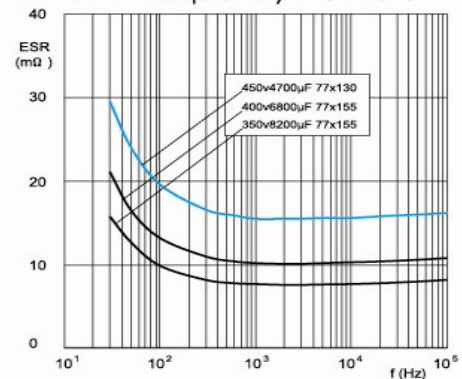

Impedance Z ~ Frequency f at 20°C

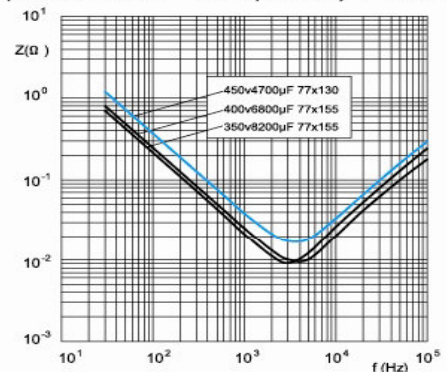

Ratings for CD 138 PC Series

U _R (Surge Voltage) Code	Rated Capacitance	Max. ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 85°C, 120Hz	Size ΦDxL	P/N
(V)	(μF)	(mΩ)	(mΩ)	(Arms)	(mm)	-
350 (400) 2V	1200	215	67	5.50	51X83	ECG2VPC122MC083□□
	1500	172	55	6.10	51X83	ECG2VPC152MC083□□
	1800	143	43	7.40	51X96	ECG2VPC182MC096□□
	2200	117	30	8.20	51X96	ECG2VPC222MC096□□
	2700	96	27	10.20	51X130	ECG2VPC272MC130□□
	3300	78	23	11.30	51X130	ECG2VPC332MC130□□
	3900	66	19	12.80	64X115	ECG2VPC392MD115□□
	4700	55	16	14.80	64X130	ECG2VPC472MD130□□
	5600	46	14	16.30	77X115	ECG2VPC562ME115□□
	6800	38	13	18.80	77X130	ECG2VPC682ME130□□
	8200	31	11	22.10	77X155	ECG2VPC822ME155□□
	10000	26	10	25.90	90X157	ECG2VPC103MF157□□
	12000	22	8	28.40	90X157	ECG2VPC123MF157□□
	15000	17	6	34.60	90X196	ECG2VPC153MF196□□
18000	14	4	41.40	90X236	ECG2VPC183MF236□□	
400 (450) 2G	1000	215	82	5.00	51X83	ECG2GPC102MC083□□
	1200	179	70	5.50	51X83	ECG2GPC122MC083□□
	1500	143	50	6.70	51X96	ECG2GPC152MC096□□
	1800	119	40	7.40	51X96	ECG2GPC182MC096□□
	2200	98	28	9.20	51X130	ECG2GPC222MC130□□
	2700	80	23	9.90	64X96	ECG2GPC272MD096□□
	3300	65	21	11.80	64X115	ECG2GPC332MD115□□
	3900	55	19	13.50	64X130	ECG2GPC392MD130□□
	4700	46	15	14.90	77X115	ECG2GPC472ME115□□
	5600	39	14	17.00	77X130	ECG2GPC562ME130□□
	6800	32	13	20.20	77X155	ECG2GPC682ME155□□
	8200	26	12	23.50	90X157	ECG2GPC822MF157□□
	10000	22	10	25.90	90X157	ECG2GPC103MF157□□
	12000	18	8	31.00	90X196	ECG2GPC123MF196□□
15000	14	6	37.50	90X236	ECG2GPC153MF236□□	
450 (500) 2W	1000	215	93	5.00	51X83	ECG2WPC102MC083□□
	1200	179	69	6.00	51X96	ECG2WPC122MC096□□
	1500	143	56	7.20	51X115	ECG2WPC152MC115□□
	1800	119	45	8.30	51X130	ECG2WPC182MC130□□
	2200	98	35	9.00	64X96	ECG2WPC222MD096□□
	2700	80	30	10.70	64X115	ECG2WPC272MD115□□
	3300	65	24	12.40	64X130	ECG2WPC332MD130□□
	3900	55	20	13.60	77X115	ECG2WPC392ME115□□
	4700	46	16	15.60	77X130	ECG2WPC472ME130□□
	5600	38	13	18.30	77X155	ECG2WPC562ME155□□
	6800	32	11	21.40	90X157	ECG2WPC682MF157□□
	8200	26	10	23.50	90X157	ECG2WPC822MF157□□
	10000	22	9	28.30	90X196	ECG2WPC103MF196□□
	12000	18	8	33.60	90X236	ECG2WPC123MF236□□

Mounting code(" B" for bolt mounting, "Y/I/N" for bracket mounting)

Terminal options(A,B,C see "Dimensions" for details.)

Customer products are available on request.